


## INSTALLATION OF YOUR POD

### Note

Good news, your pod has been configured at the factory! You just have to plug it into an outlet and wait for the light to stay on and white. If the white light on your pod does not stay on, you should complete the steps below to set up again.



This section applies to you only if you have ordered the XL Wi-Fi Router, which includes a Pod.

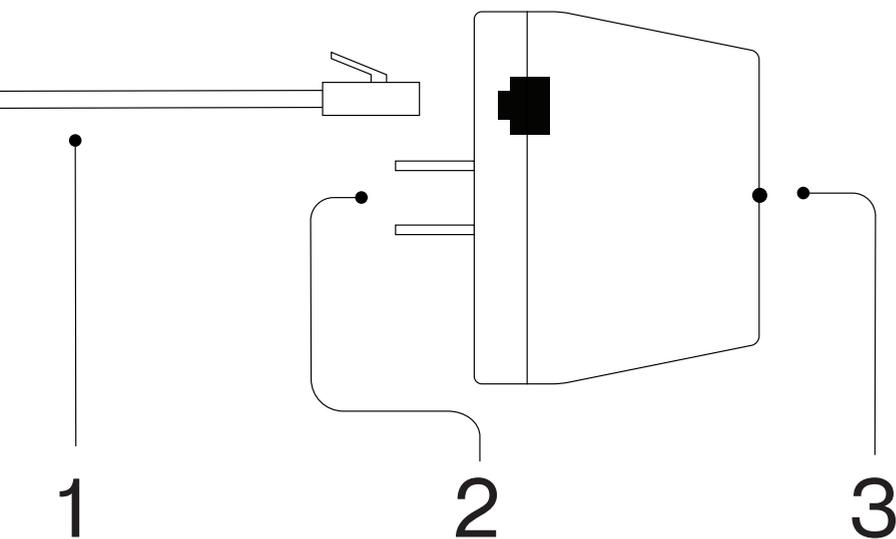


**1**  
Connect one end of the network cable to the Ethernet port on the oxio Pod and the other end to the LAN port on the router.

**2**  
Plug the oxio Pod into a nearby electrical outlet.

**3**  
Once the LED light remains white, you can unplug the oxio Pod and move it to a location of your choice.

When the light again becomes solid white, the connection is established and you can connect to your network.

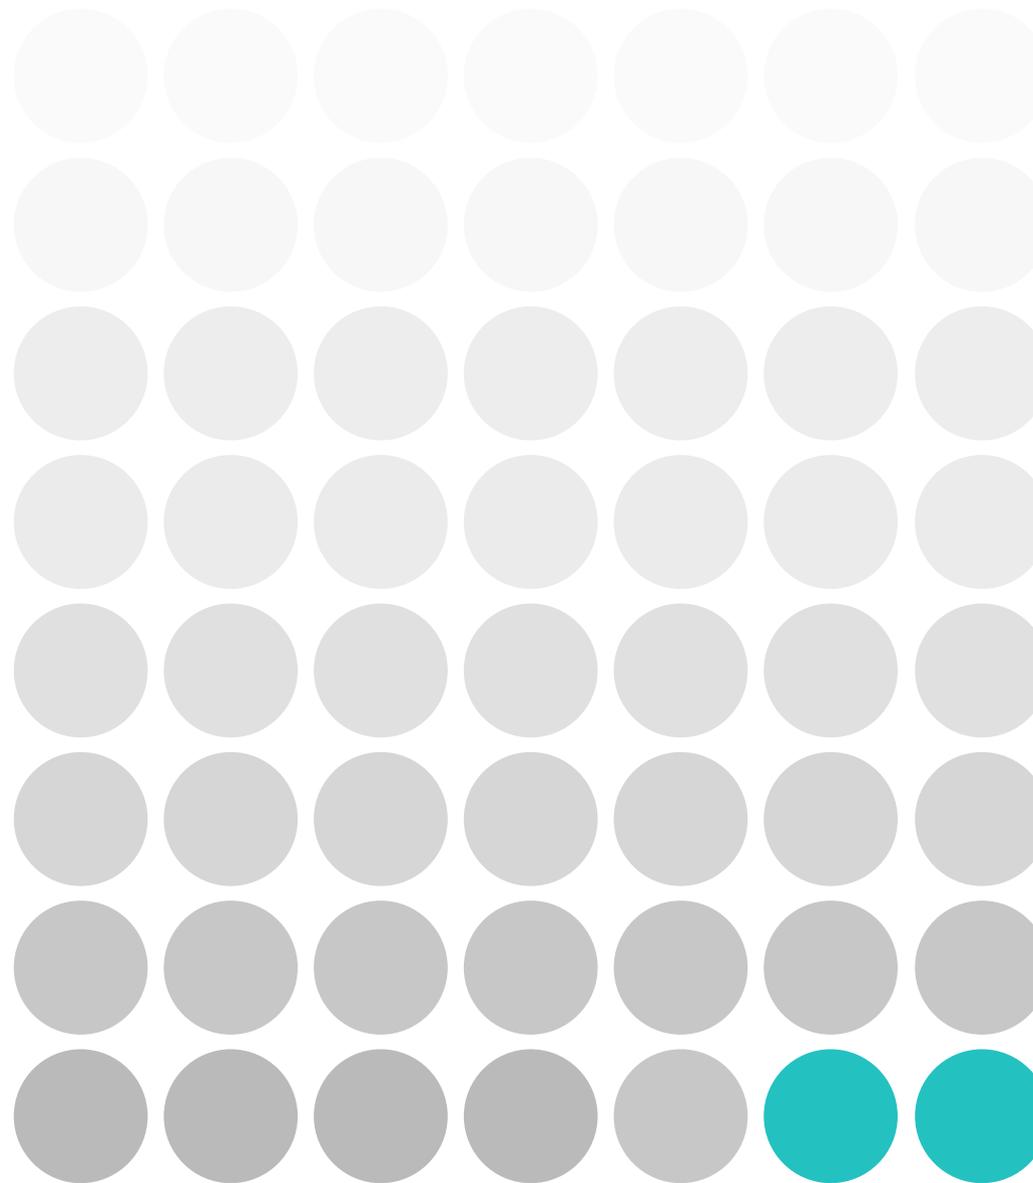

**oxio**



The oxio-XXXX network must be used by all your devices.

The TV-XXXX network should be used only with oxio TV receivers.



1

If a technician has visited, please wait 1 hour before connecting the equipment (the signal must be activated first).

If your installation doesn't require a technician's visit, please connect the equipment only after you have received your activation email.

2 ●

Plug in the coaxial cable and then plug the modem into an electrical outlet.

3

You must wait until the first 4 lights are lit.

4 ●

Connect the network cable in the modem and in the (WAN) socket of the router.

5 ●

Plug the router into an electrical outlet.

6

If no LEDs light up on the router, press the On/Off button.

7

Wait 15 minutes.

8

Locate your network name and password under the base of the router and connect your devices to the Wi-Fi.